

• • • • • •

&S& ( · %  
&S& ' ' %



& %

88







%+) ,




















f(L:  
&&&)


f) L:

868)







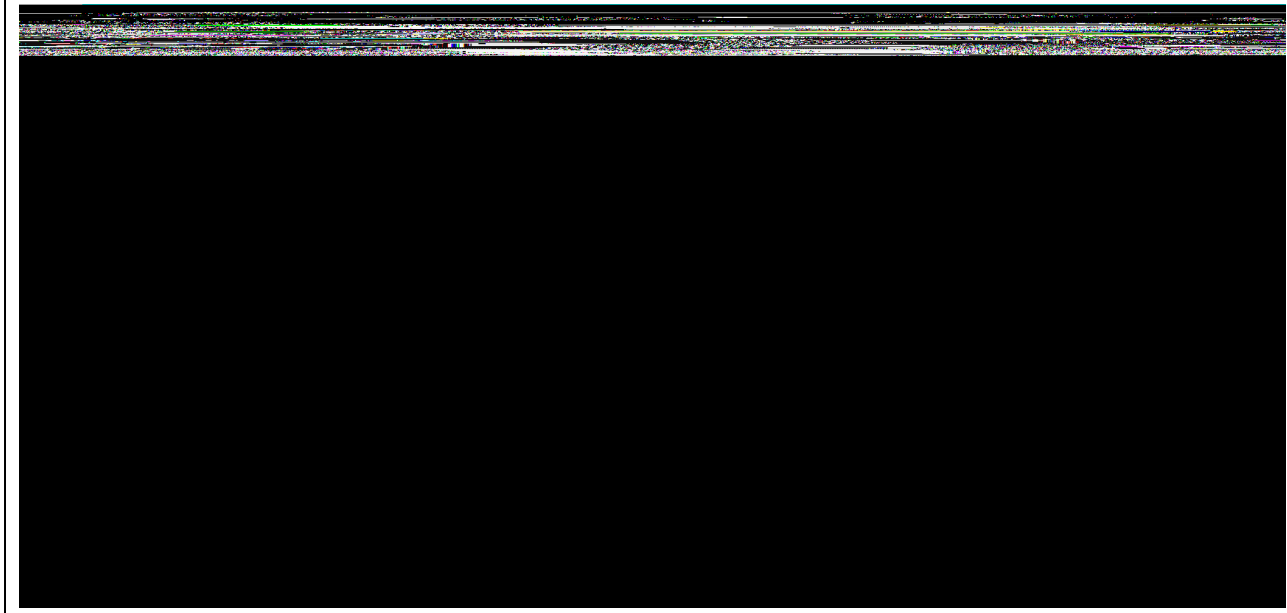













&

























	988ž( &	, (ž+%&	&žž+%6
	%ž&*	%ž-	














fl L

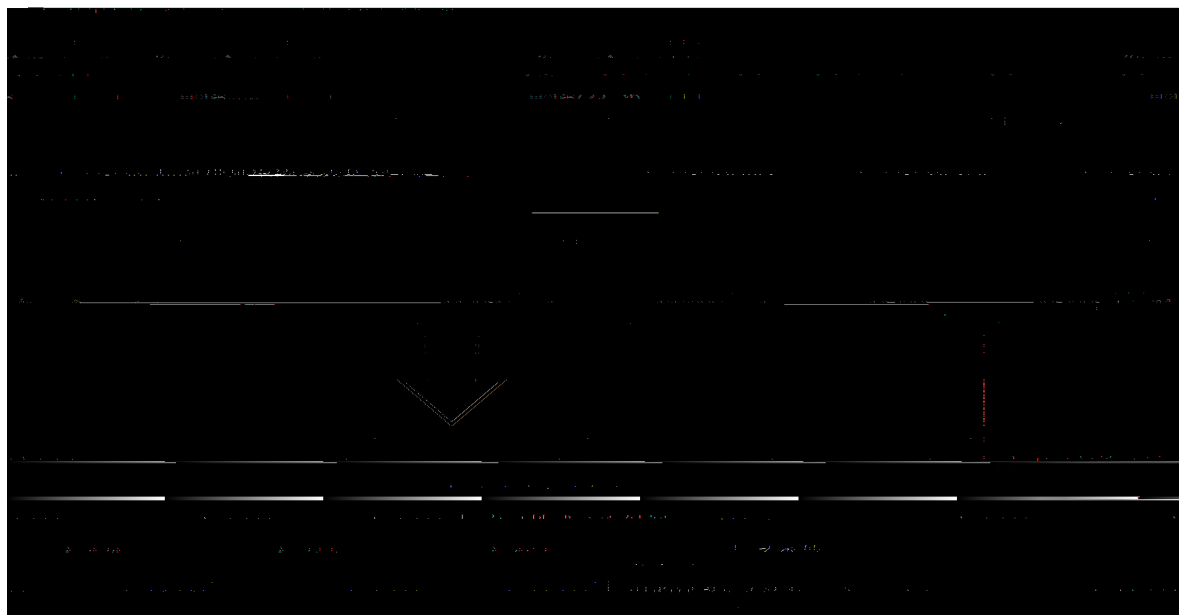











Figure 1: A sequence of ten grayscale images showing a person's face, likely used for facial recognition analysis.

88%



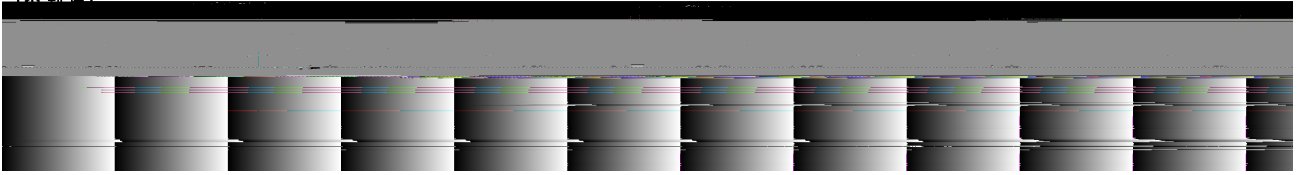

	&
	%&
	&&
	,
	%+
	%













		( %	

--	--







\*

%

&








--	--	--	--

--	--	--	--











---



		,	,
		+	+








	fl	L	
--	----	---	--











5

1

f&l:

)%

&

f&l:

,

)-

%&

2

%' & %

&&& ( %

&&& ' ' %

&&& ( %

&&& ' ' %

9M







---

fi &&& ( %























%\$S %\$

' S&

%'  
%'  
%'

' &  
' &  
' &

\$

i

%'

' &

\$

fi

%'

' &

\$

i

\$ %

%'

' &

---

&&& ' ' %

&&& ' ' %

---

\*Z\*) +

(Z) ( 8



---

S4) p uÉ ° Ø  
&& ' ' %

---

---


8888 ( .%  
888 ' ' %

---

888 ( .%  
888 ' ' %











&	' Sž* )'	' Sž* )'	
	' Sž* )'	' Sž* )'	
'	))ž' --	))ž' &&	++
	))ž' --	))ž' &&	++
(	fl+(L		










			/
--	--	--	---



--	--	--










&& ' '%


&& ' '%





..%







--	--	--	--	--	--	--	--









	&, , - *	'', ' S(
8³6"•b+(0.0#D,À.S0Òàð`0 p	'', ' S(	&, *(-





























x

x

x



































&&& \* &

9M











